



Dependable | Innovative | Outstanding Quality

POLYFORM™ REPAIR SYSTEM

Flexible external repair system for leaking and damaged pipelines.
Polyform has a **50 YEAR LIFE STANDARD**
APPROVED TO GIS LC8 & DIN 30658



NO GRIT BLASTING REQUIRED*


The Polyform System is a two-part sealant that once mixed together will form a non-slumping, robust consistency that can be applied to repair any shape and size main or fitting

Polyform is approved to Gas Industry Standard (GIS) LC8 & DVGW DIN 30658

Polyform is approved for use on low pressure and with the addition of a venting kit medium pressure applications

Independent studies show that Polyform delivers labour savings as a result of the universal fitting; ease of application and less time required on site

Ideal for situations where the pressure cannot be reduced, or the pipe flow cannot be stopped



FEATURES

- || No Grit Blasting*
- || 50 Year Life Standard
- || Labour Reduction
- || Permits Pipe Movement
- || Excellent Flexibility
- || Waterproof Once Cured

APPLICATIONS

- || Gas
- || Waste Water
- || Oil
- || Chemical
- || Low Pressure 75 mbar
- || Medium Pressure 2 Bar

PIPE MATERIALS


- || Steel
- || Copper
- || Cast Iron
- || Ductile Iron
- || Plastic
- || P.E. (Polyethylene)

ADDITIONAL EQUIPMENT

- || Precoat Kit
- || Low Pressure Kit
- || Vent Kit

*for low pressure repairs



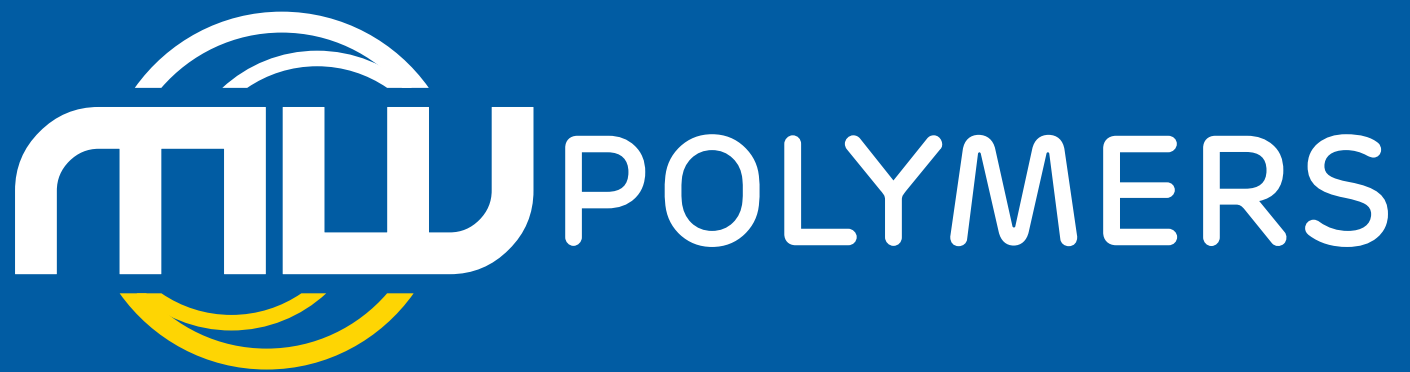

POLYFORM™ REPAIR SYSTEM

